



**Security level:**  
**Class I according to EN 1143-1 norm**

Model suitable for strongrooms and other kind of rooms in order to improve their security level.

The door ensures security level only if mounted in the wall, strongroom - according to the instruction manual.

**Description:**  
door4ever I door - strongroom door, burglar - proof.

**Door:** multi-walled door construction (84 mm thick)  
**Door frame:** double-walled (40mm thick)  
**Locking:** 3-way locking bolt system - incl. overlapping profile on the hinge side

**Standard option:**  
**Lock:** high security key lock I class VdS with two keys (120 mm)  
**Boltwork handle:** handle, class I, protruding 60 mm  
**Hinges:** external  
**Door opening angle:** 180°  
**Mounting holes:** 9 holes, 4 in each side and 1 in the top  
**Colour:** RAL 7035 (light grey)

# door4ever I



key lock

597402.01

Outer dimensions HxWxD (mm)	2000 x 1000 x 240
Door light HxW (mm)	1950 x 926
Weight	172 kg
Anchoring:	
- left side (pc.):	4
- right side (pc.):	4
- in the top (pc.):	1
Lock type	key lock (2 keys)
Colour	RAL 7035



Stellar Basic  
electronic lock

597402.02

Outer dimensions HxWxD (mm)	2000 x 1000 x 240
Door light HxW (mm)	1950 x 926
Weight	172 kg
Anchoring:	
- left side (pc.):	4
- right side (pc.):	4
- in the top (pc.):	1
Lock type	Stellar Basic electronic lock
Colour	RAL 7035

Options available against surcharge



mechanical  
code lock



Stellar Business  
electronic lock



Primor 3000 level 5  
or level 15 electronic lock



Anchor 7000  
electronic lock



B 90 electronic lock

597402.01 / 597402.02



All information concerning weight, color and dimensions are noncommittal and subject to errors and changes. Minor deviations are conditional on the production process. Technical changes, modifications and printing errors reserved. Safes may be top-heavy, during commissioning, please exercise appropriate caution in accordance with the installation guide. Pictograms are not technical description of the product.



## INNER BLOCKAGE


Additional protection from the inside (55435.01).  
Standard: movable locking handle and permanent handle.

### Mode of action



#### interior handle

- neutral position
- handle in horizontal position

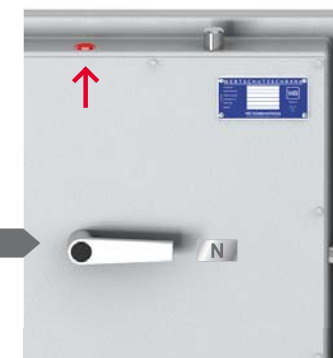


#### outer lock and handle

- lock and handle enabled
- possibility of closing and opening lock



#### interior handle

- position 45°
- activates locking mechanism
- doors bolts hidden

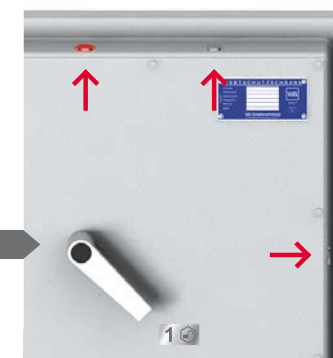


#### outer lock and handle

- locked
- not possible to lock from outside
- the ability to open the doors



#### interior handle

- vertical position
- activates additional independent locking bolt
- doors bolts hidden

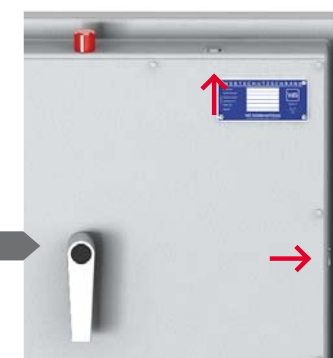

#### outer lock and handle

- locked
- not possible to lock from outside
- not possible to open or lock the doors from outside

